Headers(Sockets) for pluggable terminal blocks ／ ECH & EHD series

RoHS compliance

2ESDCR

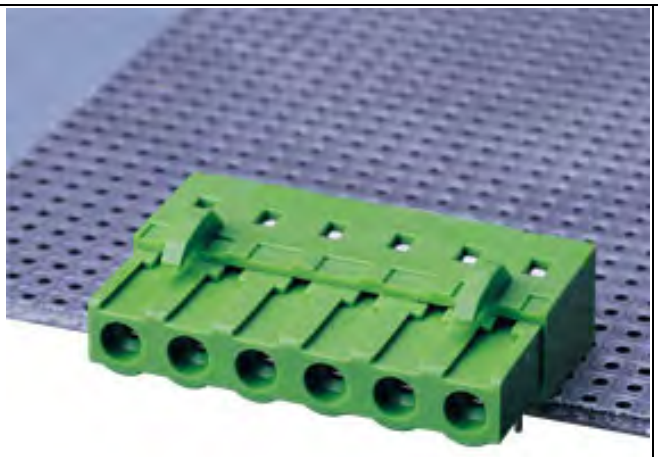

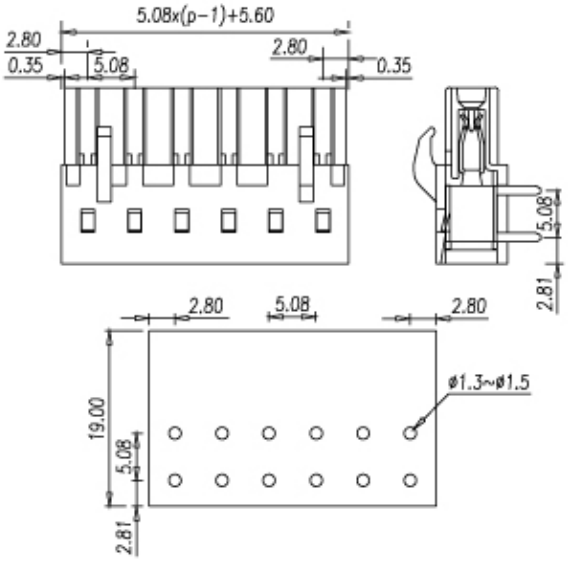

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	12A	12A
Conductor cross-section, solid (AWG/ mm^2)		
Conductor cross-section, flexble (AWG/ mm^2)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 3 KV	
Torque (N-m)		
Screw		
Wire strip length		

Pole	Cat. No.
02	2ESDCR-02P
:	:
:	:
24	2ESDCR-24P

Copyright ,DINKLE ENTERPRISE CO., LTD. All Right Reserved.