Plugs for pluggable terminal blocks ／ EC & ESD series

2ESDV

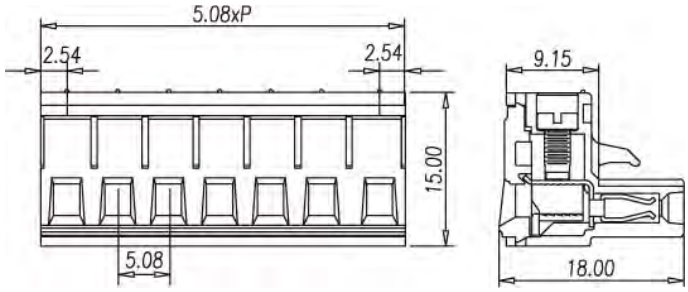

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	600V
Rated current	15A	18A
Conductor cross-section, solid (AWG/ mm^2)	28~12 / 0.2~2.5	
Conductor cross-section, flexible (AWG/ mm2)	30~12 / 0.2~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 4 / 4 KV	
Torque (Lb-m)	0.51	
Screw	M2.5	
Wire strip length	7~8mm	

Pole	Cat. No.
02	2ESDV-02P
:	:
:	:
24	2ESDV-24P

Copyright ,DINKLE ENTERPRISE CO., LTD. All Right Reserved.