European P.C.B. type terminal blocks ／ EK series

E3K508V

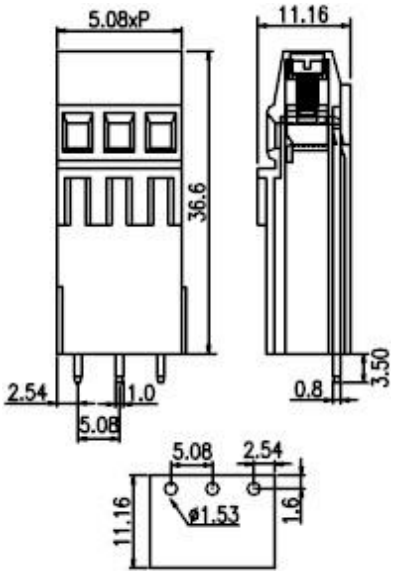

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	20A	10A
Conductor cross-section, solid (AWG/ mm^2)	24~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm^2)	24~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 4 KV	
Torque (N-m)	0.50	
Screw	M2.5	
Wire strip length	6~7mm	

Pole	Cat. No.
02	E3K508V-02P
03	E3K508V-03P
:	:
:	:

Copyright DINKLE ENTERPRISE CO., LTD. All Right Reserved.