Headers(Sockets) for pluggable terminal blocks ／ ECH & EHD series

ECH381AM

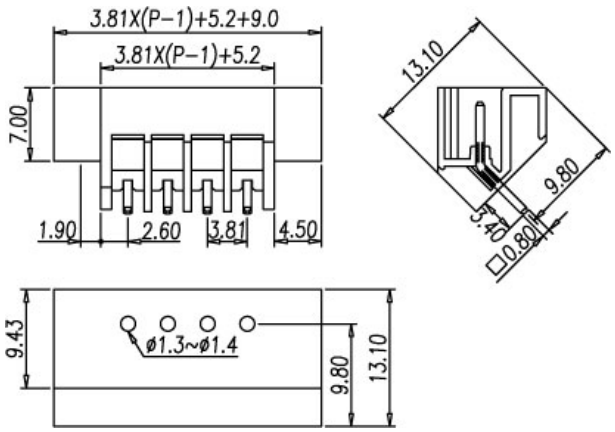

Pitch: 3.81mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	320V
Rated current	8A	14A
Conductor cross-section, solid (AWG/ mm^2)		
Conductor cross-section, flexible (AWG/ mm^2)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 3KV	
Torque (N-m)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH381AM-02P
:	:
:	:
24	ECH381AM-24P

Copyright .DINKLE ENTERPRISE CO., LTD. All Right Reserved.